NEW! CRL FALLBROOK XL SERIES OFFICE PARTITION SYSTEM



- Ideal for When Insulating Glass Sidelite Panels Are Used for Noise Reduction and Reduced Sound Transmission
- Accommodates Insulating Glass Sidelite Panel Thicknesses of 13/16", 7/8", 15/16", 1", and 1-1/8" (20, 22, 24, 26, and 28 mm)
- Accommodates 3/8" and 1/2" (10 and 12 mm) Thick Monolithic Tempered Glass Doors, or 1-9/16" (40 mm) Thick Wood Doors
- Front Load Dry Glazed System With No Exposed Fasteners
- Available in Satin Anodized and **Brushed Nickel Finishes**
- EPDM Gasket

The **NEW Fallbrook XL Series Office Partition System** is for use when insulating glass sidelite panels are utilized for noise and sound reduction. This system allows you to create an office front with a "floating" door frame aesthetic, and the slim profile framing allows maximum transparency. The Fallbrook XL Series is designed to accommodate 3/8" or 1/2" (10 or 12 mm) thick monolithic tempered glass doors, as well as 1-9/16" (40 mm) thick wood doors. The insulating glass sidelite panels can be 13/16", 7/8", 15/16", 1", or 1-1/8" (20, 22, 24, 26, or 28 mm) thick.


For additional information, please visit us online at crlaurence.com/office-partitions or contact Technical Sales at (800) 421-6144 in the U.S., (877) 421-6144 from Canada, or (323) 588-1281 International. Ask for extension 7770. You can also send email to partitions@crlaurence.com.

Slim Profile Framing: The Hallmark of the CRL Fallbrook XL Series

Go to

ence.com/office-par for a full selection of

Fallbrook Series Office Partition Systems and Components.

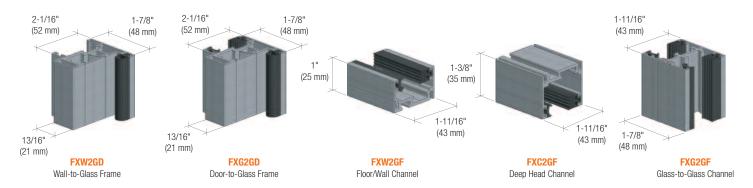

CRL FALLBROOK XL SERIES OFFICE PARTITION SYSTEM TYPICAL INSTALLATIONS

CRL Fallbrook XL Series Door-to-Glass Door Frame Set


Glazing Channels, Door Hinges, and Locks Sold Separately





(Door)

(Sidelite Panels)

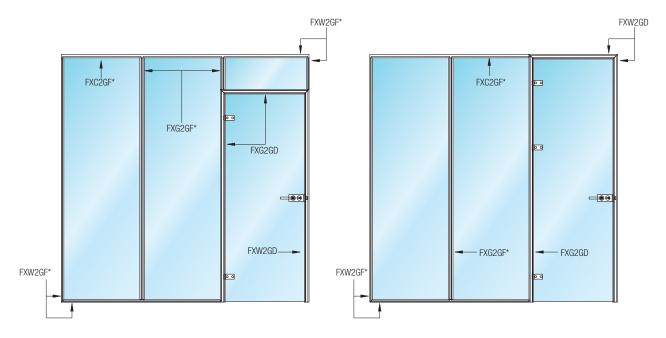

CAT. NO.	GASKET COLOR	FINISH
FXTG2GDSA	Gray	Satin Anodized
FXTG2GDBN	Black	Brushed Nickel

Minimum order: 1 each.

*FXC2GF, FXG2GF, FXW2GF and FXW2G Optional Channels must be ordered separately.

Each Set Includes:

2 each 96-7/16" (2.45 m) lengths of Door Frame 1 each 43-5/16" (1.1 m) length of Door Frame 1 each Strike Plate

3 pair Hammer Head Nuts 4 each Corner Connectors







ORDERING INFORMATION:

Hinges, Locks, and Glazing Channels must be ordered separately (see crlaurence.com/office-partitions).

AVDB4242**B**_8/17

Go to